

超硬ドリル CARBIDE DRILLS

小径ステンレス加工用超硬マイクロレボリューションドリル  
MICRO REVOLUTION CARBIDE DRILL FOR STAINLESS

MRS-GDL

形状寸法表


DRILLS  
超硬ドリル  
CARBIDE DRILLS



フォーファセットポイント  
Four Facet point  
(Dc ≤ 1.15mm)



X形シンニング  
X thinning  
(Dc ≥ 1.2mm)

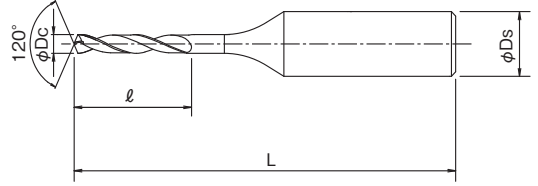

●マークの説明はP2をご覧ください。See page 2 for explanation of icons.

単位:mm Unit:mm

ツールNo. EDP NO.	外径 Dc	溝長 ℓ	全長 L	シャンク径 Ds	在庫 Stock	標準価格 (Yen)	ツールNo. EDP NO.	外径 Dc	溝長 ℓ	全長 L	シャンク径 Ds	在庫 Stock	標準価格 (Yen)
8577050	0.5	6	42	3	C	3,820	8577155	1.55	18.6	54	3	C	2,460
8577054	0.54	6.6				3,820	8577156	1.56	3,040				
8577055	0.55	7.2				3,040	8577157	1.57	3,040				
8577056	0.56	7.2				3,820	8577160	1.6	2,460				
8577060	0.6	7.8	2,650			8577170	1.7	20.4	2,650				
8577063	0.63		3,820			8577180	1.8	21.6	2,650				
8577064	0.64	8.4	3,820			8577181	1.81	58	3,240				
8577065	0.65	3,040	8577182			1.82	22.2		3,240				
8577070	0.7	9	2,650			8577183	1.83	3,240					
8577071	0.71		3,820			8577190	1.9	22.8	2,650				
8577072	0.72	9.6	3,820			8577198	1.98	62	3,240				
8577073	0.73		3,820			8577199	1.99		24	3,240			
8577074	0.74	10.2	3,820			8577200	2	66	2,650				
8577075	0.75		3,040			8577210	2.1		25.2	2,840			
8577080	0.8	10.8	2,650			8577212	2.12	62	3,430				
8577081	0.81	11.4	3,820			8577213	2.13		25.8	3,430			
8577082	0.82		3,820			8577214	2.14	26.4	3,430				
8577090	0.9	12	2,650			8577220	2.2	66	2,840				
8577091	0.91		3,820	8577229	2.29	27.6	3,430						
8577092	0.92	13.2	3,820	8577230	2.3	66	2,840						
8577100	1		2,460	8577231	2.31		28.2	3,430					
8577110	1.1	13.8	2,460	8577239	2.39	66	3,430						
8577111	1.11		3,040	8577240	2.4		28.8	2,840					
8577112	1.12	14.4	3,040	8577241	2.41	66	3,430						
8577115	1.15		2,460	8577242	2.42		29.4	3,430					
8577120	1.2	15.6	2,460	8577250	2.5	66	2,840						
8577127	1.27		3,040	8577255	2.55		30.6	3,430					
8577128	1.28	16.8	3,040	8577256	2.56	66	3,430						
8577129	1.29		3,040	8577257	2.57		31.2	3,430					
8577130	1.3	17.4	2,460	8577260	2.6	66	2,840						
8577140	1.4		2,460	8577270	2.7		32.4	2,840					
8577145	1.45	18	2,460	8577277	2.77	66	3,430						
8577146	1.46		3,040	8577278	2.78		33.6	3,430					
8577147	1.47	18.6	3,040	8577279	2.79	66	3,430						
8577150	1.5		2,460	8577280	2.8		34.8	2,840					
8577151	1.51	18.6	3,040	8577290	2.9	66	2,840						
8577152	1.52		3,040	8577300	3		36	2,840					
8577153	1.53		3,040										

1. 切削油剤はP542をご参照下さい。

1. Cutting fluid : Please refer to P542.

低炭素鋼	中炭素鋼	高炭素鋼	合金鋼	調質鋼	焼入鋼			ステンレス鋼	工具鋼	鋳鉄	ダクタイル鋳鉄	銅合金	アルミ展伸材	アルミ合金鑄物	チタン	チタン合金	インコネル®	マグネシウム合金	金属基複合材料(MMC)
Low Carbon Steels	Medium Carbon Steels	High Carbon Steels	Alloy Steels	Hardened Steels	Quenched and Tempered Steels			Stainless Steels	Tool Steels	Cast Iron	Ductile Cast Iron	Copper Alloys	Aluminum	Aluminum Alloy Casting	Titanium	Titanium Alloys	Inconel®	Magnesium Alloy	Metal Matrix Composites
C~0.25%	C0.25~0.45%	C0.45%~	SCM	~35 HRC	35~45 HRC	45~50 HRC	50~62 HRC	62~70 HRC	SUS	SKD SKS	FC	FCD	Cu	AL	AC	TI		AZ91D	
									◎										

A、B、C、D=標準在庫品 A、B、C、D=Standard stock item.  
□=特定代理店在庫品 □=Stocked by specific distributors. Contact us for price & availability.